




## **IMPORTANT TC300**

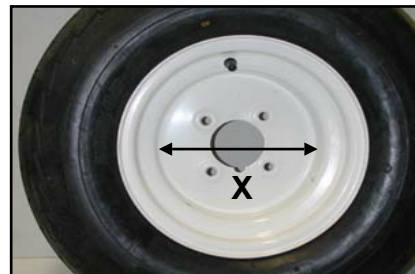

**PLEASE CHECK.** Wheel rim smallest internal diameter. X must be minimum 210mm.

### Features:

- Simple to use, only two parts to clamp.
- No pre-assembly required.
- Comes complete with Bulldog's Plunge Lock which can be locked without the use of the key.
- 10 pin drill and pick resistant lock with over a million possible key combinations.
- Main arm constructed from 75 x 6mm rolled edge steel.
- 11" (270mm) diameter wheel nut protection disc 3mm thick.
- Models available:-
  - TC100: To fit tyres 4.80/4.00 x 8" (4PR Load Range)
  - TC100X: To fit tyres 4.80/4.00 x 8" (6PR Load Range)
  - TC150: To fit tyres 16.5 x 6.5 - 8"
  - TC200: To fit tyres 5.00 x 10" 5.20 x 10" 145 x 10"
  - TC250: Fits 155/70 R12 (**suitable for 155/70 R12 heavy duty tyres fitted to twin wheel Ifor Williams Car Transporters which measure 170mm in width (For normal 155/70 R12 Applications see QD11).**
  - TC300: To fit tyres 20.5 x 8 - 10" (See diagram).
  - TC350: To fit tyres 195/55 R10 ( Not Eternity Tyre)
  - TC355 To fit tyres 195/55 R10 ( Eternity Tyre)
  - TC400: To fit tyres 145/70 R13

**Please note this wheel clamp is not suitable for alloy wheels.**

- Weight TC100 = 6.6kg TC100X=6.6kg TC150 = 7.5kg TC200 = 8.3kg  
TC250 = 8.1kg TC350 = 8kg TC300 = 8.0kg TC400= 9.0kg

### **Bulldog Security Products Ltd**

Units 1 - 4 Stretton Road, Much Wenlock, Shropshire, TF13 6DH.

Tel: 01952 728171 Fax: 01952 728117

Email: [sales@bulldogsecure.com](mailto:sales@bulldogsecure.com) [www.bulldogsecure.com](http://www.bulldogsecure.com)