


# Accessories

## Removable Socket

### Padlockable

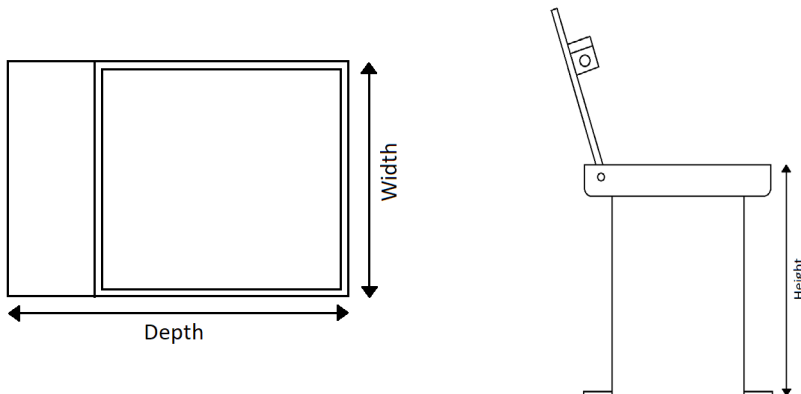

Removable products are supplied with a socket, which will require casting into concrete.

Sockets are manufactured from galvanised mild steel.

Sockets exclude the padlock to secure.

Additional sockets can be purchased at extra cost, if required. Parts such as the lid can also be purchased at extra cost.

Integral locking sockets also available.

Part Number	Description	Size - Depth x Width x Height	Weight
138 500 085	100SQ SOCKET & LID ASS GALV	150mm x 130mm x 220mm	4kg
138 500 087	160SQ SOCKET & LID ASS GALV	210mm x 195mm x 300mm	8kg
138 500 089	225SQ SOCKET & LID ASS GALV	280mm x 265mm x 300mm	13kg

Part number	For use with diameters		
	Mild Steel - Round	Mild Steel - Square	Stainless steel - Round
138 500 085	48, 60, 76 and 90	50, 60, 70, 80 and 90	48, 60, 76 and 90
138 500 087	101, 114, 127, 139 and 152	100, 120 and 150	101, 114, 129 and 139
138 500 089	168, 193 and 219	100, 120 and 150	154, 168 and 204

### Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).

