

PRODUCT SPECIFICATION

MATERIAL:

Grade 316 Stainless Steel with welded semi-dome top cap

FINISH:

Brushed Satin

WEIGHT:

9 KG Approx

MAINTENANCE:

MSFCM-SS01 - Stainless Steel Cleaning and Maintenance

INSTALLATION:

1. Excavate suitable foundation for the bollard
2. Position bollard in excavated hole.
3. Cast concrete mass around bollard
4. Allow the foundation to cure



NOTES:

All dimensions are in millimeters unless otherwise stated

This drawing is the sole property and copyright of Marshalls Street Furniture and may not be disclosed to any third party or reproduced in whole or in part without the prior written consent of an authorised representative of the company.

Marshalls PLC reserves the right to change the specifications of products noted above without notice

Foundation sizes given are suited to sub-soils with good load bearing capabilities, where adverse site conditions are met professional advice to be sought

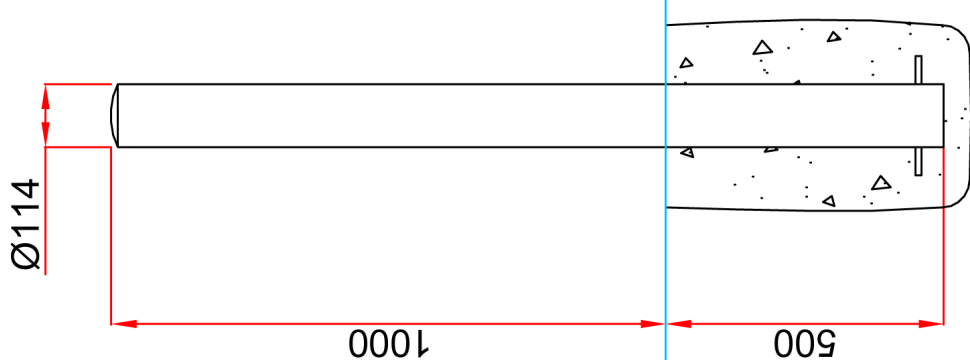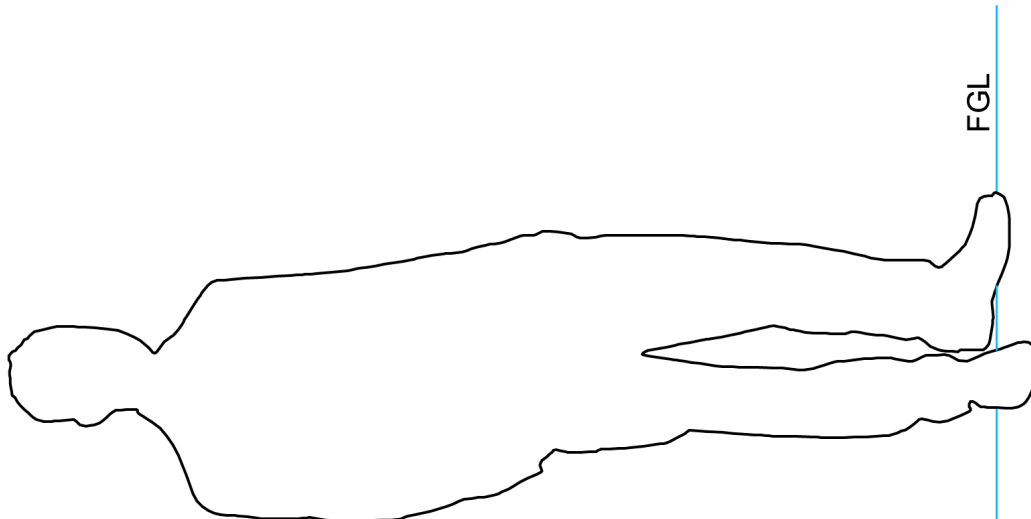


A	FIRST ISSUE	06.06.11	EB
RevNo	Revision Note	Date	Signature

Title:

RS001 STAINLESS STEEL BOLLARD
114DIA X 1500 LONG WSDC

Drawing No:

PS-RH-BL-10182



THIRD ANGLE PROJECTION

Drawn By:	EB	Date:	06.06.11
DO NOT SCALE DRAWING			
Scale:	NTS	Sheet:	1 of 1

A3