


Usage guidelines

- 1 Remove cap from Skipper Q™ unit by twisting the top cap clockwise.
- 2 Once the cap has been removed, screw the base of the plastic frame into the new cap (with hole in it). Please ensure the black washer sits above the cap and under the sign. Tighten up with a Phillips head screwdriver.



- 3 Insert A4 signage (not supplied) into flexiglass holder.
- 4 Slide the flexiglass holder into the frame.
- 5 Position the cap (with frame) onto the Skipper Q™ unit and twist anti clockwise until the cap lines up with the unit.

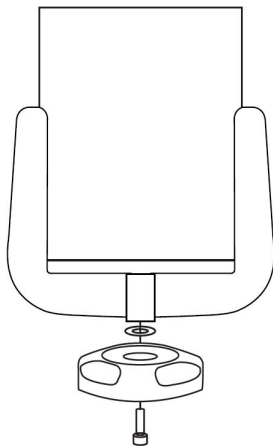

Made in the United Kingdom

Web: www.skippertm.co.uk

Tel: +44 (0) 1565 755 865

Email: sales@skippertm.co.uk

Skipper™

The total safety management solution